

# PAR 56 Lightfixture/ Foco PAR 56

**P**AR-56 light is specifically developed for heavy use for the lighting of swimming pools. Available in many different types, all sold by SAFE RAIN: PAR 56, over traditional size in white and with automatic RGB changes, reducing installation costs as a separate RGB controller is not necessary; this light also exists in an extra flat model.

**E**ste tipo de lámparas están desarrolladas por utilizarse para la iluminación de piscinas. Existen muchas variedades de esta lámpara, todas comercializadas por SAFE RAIN: la PAR 56 de tamaño tradicional en blanco y con cambios automáticos RGB, lo que hace que no sea necesario un controlador RGB, reduciendo el coste de la instalación; existe otro modelo de lámpara de este tipo que es extraplana.




Certifications/ Certificaciones **IP68 CE**



Polypropylene

Brass

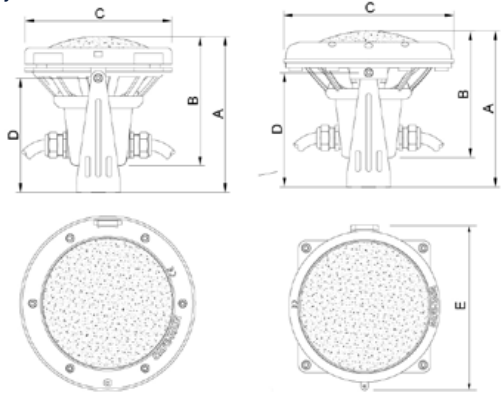

Measures (mm)		A	B	C	D	E
Polypropylene		211,5	172	Ø 231	155	-
Brass		211,5	175,5	Ø 199	155	218
Slim/ Plana	Polypropylene (*)	179,5	66	Ø 231	123,5	-
	Brass (*)	172,5	62	Ø 199	123,5	218

Light charts/ Gráficos de iluminación.

Spot/ Intensivo			Spot/ Intensivo LED			Flood/ Extensivo				
Power	230V AC/ 300 W		Power	12V AC/ 35W		Power	12V AC/ 300 W		230V AC/ 300 W	
Distance/ Distancia	Beam/ Haz de luz (m)	Centre/ Centro	Distance/ Distancia	Beam/ Haz de luz (m)	Centre/ Centro	Distance/ Distancia	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro
2 m	Ø 0,8	5500 lx	0,5 m	Ø 0,5	3800 lx	2 m	Ø 3,3	2625 lx	Ø 3,3	2250 lx
4 m	Ø 1,7	1375 lx	1 m	Ø 1,6	1380 lx	4 m	Ø 6,7	656 lx	Ø 6,7	560 lx
8 m	Ø 3,4	343 lx	1,5 m	Ø 2,5	694 lx	6 m	Ø 10,0	291 lx	Ø 10,0	250 lx
			2 m	Ø 3,3	400 lx					

## Details/ Detalles

## Electrical data/ Datos eléctricos

Polypropylene + Fiber-glass/ Polipropileno + Fibra de vidrio				Brass/ Latón		Lamp/ Lámpara					Lamp/ Lámpara	Elect. Connection/ Conex. Elect.
Reference/ Referencia	Weight/ Peso	Reference/ Referencia	Weight/ Peso	Voltage/ Voltaje	Power/ Potencia	Type/ Tipo	Beam angle/ Ángulo	Color/ Color	Intensity/ Intensidad	Life span/ Vida útil		
F5351308	1,9 Kg	F5361309	5,5 Kg	12 V AC	300 W	Incandescence/ Incandescencia	30°	2750 K	6000 lm	1000 Hrs	F5631311	2PG 21 Ø11,7/15/18,6
F5352309	1,9 Kg	F5362301	5,5 Kg	230 V AC	300 W		30°		3450 lm	2000 Hrs	F5632323	
F5352311	1,9 Kg	F5362312	5,5 Kg	230 V AC	300 W		19°		3450 lm		F5632312	
F5510013	1,9 Kg	F5520014	5,5 Kg	12 V AC	45 W	LED	-	White 6500 K	1050 lm	25000 Hrs	F5644091	2PG 16 Ø7/9/12
F5515018	1,9 Kg	F5525019	5,5 Kg	12 V AC	35 W		-	RGB (Auto)	390 lm		F5644517	
F5530915 (*)	1,6 Kg	F5540916 (*)	2,5 Kg	12 V AC	35 W		LED Slim (4m cable)	160°	White 6500 K		1766 lm	
F5535911 (*)	1,6 Kg	F5545912 (*)	2,5 Kg	12 V AC	35 W	LED Slim (4m cable)	160°	RGB (Auto)	627 lm		F5645597	
F5350004	1,5 Kg	F5360005	4,9 Kg	12 V AC	REF Without lamp (Incandescence)/ REF sin lámpara (Incandescencia)						2PG 21 Ø11,7/15/18,6	
F5350015	1,5 Kg	F5360016	4,9 Kg	230 V AC	REF Without lamp (Incandescence)/ REF sin lámpara (Incandescencia)						2PG 16 Ø7/9/12	
F5510002	1,5 Kg	F5520003	4,9 Kg	12 V AC	REF Without lamp (LED)/ REF sin lámpara (LED)							