

# Dichroic lightixtures/ Foco dicroico


**P**lastic and stamped brass models are offered. They house lights with a power up to 50 W. The cable glands fitted to them are designed and manufactured by Safe-Rain, with the complete safety of the **IP68 protection rating**. This data shows that **these lights are very suitable for lighting secondary effects in architectural water features**

**E**xiste el modelo de plástico y de latón estampado. Alberga en su interior una lámpara de hasta 50W de potencia. Los prensaestopas que llevan son diseñados y fabricados por Safe-Rain, con la total seguridad de conseguir un grado de **protección IP68**. **Estos datos hacen que estos focos sean muy adecuados para iluminar efectos secundarios en fuentes ornamentales.**



Certiications/ Certiicaciones

**IP68**

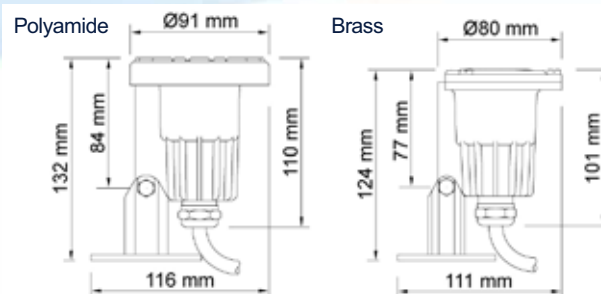

Light charts/ Gráficos de iluminación.

Spot/ Intensivo				
Power	20 W		50 W (†)	
Distance/ Distancia	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro
2 m	Ø 0,35	1000 lx	Ø 0,35	2500 lx
4 m	Ø 0,70	250 lx	Ø 0,70	625 lx
6 m	Ø 1,40	111 lx	Ø 1,40	277 lx

Flood/ Extensivo				
Power	20 W		50 W (†)	
Distance/ Distancia	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro
1 m	Ø 0,60	700 lx	Ø 0,60	2000 lx
2 m	Ø 1,30	175 lx	Ø 1,30	500 lx
3 m	Ø 2,00	78 lx	Ø 2,00	222 lx

Details/ Detalles				Electrical data/ Datos eléctricos								
Polyamide 6-6/ Po- liamida 6-6		Brass/ Latón		Transformer/ Transformador	Lamp/ Lámpara				Life span/ Vida útil	Lamp Ref./ Ref. Lámpara	Elect. Conect./ Conex. Elect.	
Reference/ Referencia	Weight/ Peso	Reference/ Referencia	Weight/ Peso		Voltage/ Voltaje	Power/ Potencia	Type/ Tipo	Beam angle/ Ángulo				Color/ Color
F5431217	0,35 Kg	F5441218	0,94 Kg		12 V AC	20 W	Halogen / Halógenas	10°	3000 K	6000 cd	4000 Hrs	F5631219
F5431228	0,35 Kg	F5441229	0,94 Kg		12 V AC	20 W		36°		1000 cd		F5631221
F5431511 (†)	0,35 Kg	F5441512 (†)	0,94 Kg		12 V AC	50 W		10°		15000 cd		F5631513
F5431522 (†)	0,35 Kg	F5441523 (†)	0,94 Kg		12 V AC	50 W		36°		2850 cd		F5631524
F5430014	0,32 Kg	F5440015	0,91 Kg		Without lamp/ Sin lámpara							

Lightixtures with voltage transformer includes 5m cable/ Los focos con transformador incluyen cable 5m