


# Ocean LED light/ Foco Ocean

The **Ocean submersible LED light** is the result of our constant search of the excellence. Lighting available in 36W and 120 W LED High performance, optional RGB, RGBW, and WHITE, also 10° or 30° lenses, IP 68 connector included, DMX controllable. Manufactured in brass and Stainless Steel AISI-304, **new slim design, is strong and very light, IP68 certified.** High heat dissipation, thanks to the large contact area.

El **foco LED sumergible Ocean** es el resultado de nuestra continua búsqueda de la excelencia. Iluminación disponible en 36W y 120W de potencia LED de alto rendimiento y opcional RGB, RGBW, BLANCO, y ópticas 10° o 30°, conector incluido, controlables DMX. Fabricado en Latón y Acero Inoxidable AISI-304, **diseño extra-plano, es un foco robusto, muy ligero y certificado IP 68.** Alta disipación de calor, gracias a la gran superficie de contacto.



Certifications/ Certificaciones **IP68 CE**

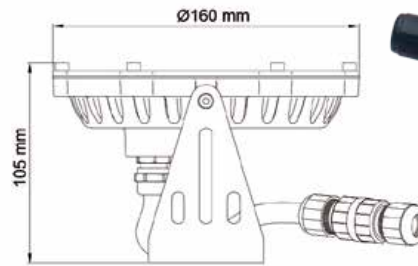

Light charts/ Gráficos de iluminación.

Spot/ Intensivo (Beam 10°)							Flood/ Extensivo (Beam 30°)						
Color	White/ Blanco		RGB		RGB W		Color	White		RGB		RGBW	
Distance/ Distancia	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro	Distance/ Distancia	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro
1 m	Ø 0,24	16808 lx	Ø 0,21	12063 lx	Ø 0,21	18300 lx	1 m	Ø 0,34	10171 lx	Ø 0,30	6095 lx	Ø 0,30	15284 lx
2 m	Ø 0,48	4202 lx	Ø 0,42	3016 lx	Ø 0,42	4560 lx	2 m	Ø 0,68	2543 lx	Ø 0,59	1524 lx	Ø 0,59	3336 lx
3 m	Ø 0,73	1867 lx	Ø 0,63	1340 lx	Ø 0,63	2030 lx	3 m	Ø 1,03	1130 lx	Ø 0,89	677 lx	Ø 0,89	1614 lx
4 m	Ø 0,97	1050 lx	Ø 0,84	754 lx	Ø 0,84	1150 lx	4 m	Ø 1,37	636 lx	Ø 1,19	381 lx	Ø 1,19	882 lx
5 m	Ø 1,21	672 lx	Ø 1,05	482 lx	Ø 1,05	732 lx	5 m	Ø 1,71	407 lx	Ø 1,49	244 lx	Ø 1,49	520 lx
7 m					Ø 1,47	370 lx						Ø 2,09	288 lx
9 m					Ø 1,89	220 lx						Ø 2,68	190 lx

Electrical data/ Datos eléctricos								Details/ Detalles					
Reference/ Referencia	Power/ Potencia	Voltage/ Voltaje	Beam angle/ Ángulo	Color/ Color	LEDs Num./ Nº de LEDs	Lumens/ Lúmens	Life span/ Vida útil	Material/ Material	Weight/ Peso	Elect. connection/ Conexión eléctrica			
F5210201	36 W	24V DC	10°	White 6500K	12	1486 lm	40000/hrs	STAINLESS STEEL AISI-304 - BRASS/ ACERO INOXIDABLE AISI-304 - LATÓN	1,63 kg	0,5 m cable with IP68 connector H05RR-F/H05RN-F H07RR-F/H07RN-F Ø 5 - Ø 12			
F5210212			30°			1524 lm							
F5215206			10°	702,9 lm									
F5215217			30°	702,3 lm									
F5216409	120 W		10°	RGBW		5000 lm							0,5 m cable with IP68 connector H05RR-F/H05RN-F H07RR-F/H07RN-F Ø 10 - Ø 13
F5216411			30°										

Further information at [www.saferain.com](http://www.saferain.com) | Más información en [www.saferain.com](http://www.saferain.com)