


PAR 56 Lightfixture/ Foco PAR 56

PAR-56 light is specifically developed for heavy use for the lighting of swimming pools. Available in many different types, all sold by SAFE RAIN: PAR 56, over traditional size in white and with automatic RGB changes, reducing installation costs as a separate RGB controller is not necessary; this light also exists in an extra flat model.

Este tipo de lámparas están desarrolladas por utilizarse para la iluminación de piscinas. Existen muchas variedades de esta lámpara, todas comercializadas por SAFE RAIN: la PAR 56 de tamaño tradicional en blanco y con cambios automáticos RGB, lo que hace que no sea necesario un controlador RGB, reduciendo el coste de la instalación; existe otro modelo de lámpara de este tipo que es extraplana.

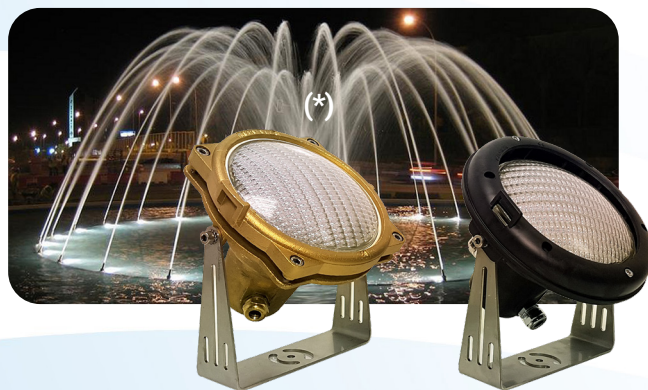

Certifications/ Certificaciones


IP68 CE



Measures (mm)		A	B	C	D	E
Polypropylene		211,5	172	Ø 231	155	-
Brass		211,5	175,5	Ø 199	155	218
Slim/ Plana	Polypropylene (*)	179,5	66	Ø 231	123,5	-
	Brass (*)	172,5	62	Ø 199	123,5	218

Polypropylene

Brass

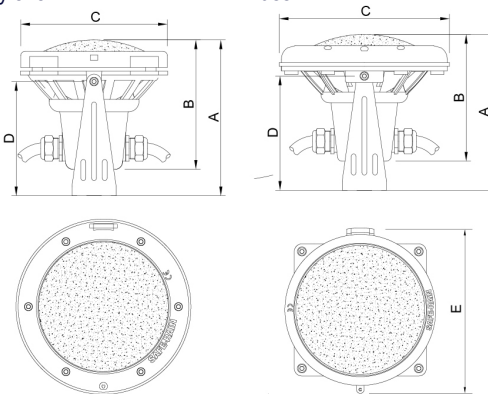

Light charts/ Gráficos de iluminación.

Spot/ Intensivo			Spot/ Intensivo LED			Flood/ Extensivo				
Power	230V AC/ 300 W		Power	12V AC/ 35W		Power	12V AC/ 300 W		230V AC/ 300 W	
Distance/ Distancia	Beam/ Haz de luz (m)	Centre/ Centro	Distance/ Distancia	Beam/ Haz de luz (m)	Centre/ Centro	Distance/ Distancia	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro
2 m	Ø 0,8	5500 lx	0,5 m	Ø 0,5	3800 lx	2 m	Ø 3,3	2625 lx	Ø 3,3	2250 lx
4 m	Ø 1,7	1375 lx	1 m	Ø 1,6	1380 lx	4 m	Ø 6,7	656 lx	Ø 6,7	560 lx
8 m	Ø 3,4	343 lx	1,5 m	Ø 2,5	694 lx	6 m	Ø 10,0	291 lx	Ø 10,0	250 lx
			2 m	Ø 3,3	400 lx					

Details/ Detalles

Electrical data/ Datos eléctricos

Polypropylene + Fiber-glass/ Polipropileno + Fibra de vidrio				Brass/ Latón		Lamp/ Lámpara					Lamp/ Lámpara	Elect. Connection/ Conex. Elect.	
Reference/ Referencia	Weight/ Peso	Reference/ Referencia	Weight/ Peso	Voltage/ Voltaje	Power/ Potencia	Type/ Tipo	Beam angle/ Ángulo	Color/ Color	Intensity/ Intensidad	Life span/ Vida útil			
F5351308	2,4 Kg	F5361309	6,0 Kg	12 V AC	300 W	Incandescence/ Incandescencia	30°	2750 K	6000 lm	1000 Hrs	F5631311	2PG 21 Ø11,7/15/18,6	
F5352309	2,4 Kg	F5362301	6,0 Kg	230 V AC	300 W		30°		3450 lm		2000 Hrs		F5632323
F5352311	1,9 Kg	F5362312	6,0 Kg	230 V AC	300 W		19°		3450 lm	F5632312			
F5510013	2,4 Kg	F5520014	6,0 Kg	12 V AC	45 W	LED	-	White 6500 K	1050 lm	25000 Hrs	F5644091		2PG 16 Ø7/9/12
F5515018	2,4 Kg	F5525019	6,0 Kg	12 V AC	35 W		-	RGB (Auto)	390 lm		F5644517		
F5530915 (*)	2,1 Kg	F5540916 (*)	3,0 Kg	12 V AC	35 W	LED Slim	160°	White 6500 K	1766 lm		F5645092		
F5535911 (*)	1,6 Kg	F5545912 (*)	3,0 Kg	12 V AC	35 W	(4m cable)	160°	RGB (Auto)	627 lm		F5645597		
F5350004	2,1 Kg	F5360005	5,4 Kg	12 V AC	REF Without lamp (Incandescence)/ REF sin lámpara (Incandescencia)						2PG 21 Ø11,7/15/18,6		
F5350015	2,0 Kg	F5360016	5,4 Kg	230 V AC	REF Without lamp (Incandescence)/ REF sin lámpara (Incandescencia)						2PG 16 Ø7/9/12		
F5510002	2,0 Kg	F5520003	5,4 Kg	12 V AC	REF Without lamp (LED)/ REF sin lámpara (LED)								