


Bubbler / Borbotón

Very special nozzle, develops a **frothy and crystalline effect**, due to the lower proportion of air contained inside, low-height jets (recommendation max. 50 CM) with a **undefined cylindrical and wide shape, very aesthetic, silent and consistent**. Nozzle made entirely of **AISI 316** stainless steel and with integrated flow straighteners. We have several sizes, choose the one that best suits the requirements of your fountain.

Boquilla muy especial, desarrolla un **efecto espumoso y cristalino**, debido a la menor proporción de aire que contiene en su interior, chorros de baja altura (recomendación máx. 50 CM) con forma **poco definida cilíndrica y ancha, muy estéticos, silenciosos y consistentes**. Boquilla fabricada íntegramente en acero inoxidable **AISI 316** y con tranquilizador de chorro integrado. Disponemos de varios tamaños, elige el que mejor se adapte a los requerimientos de tu fuente.

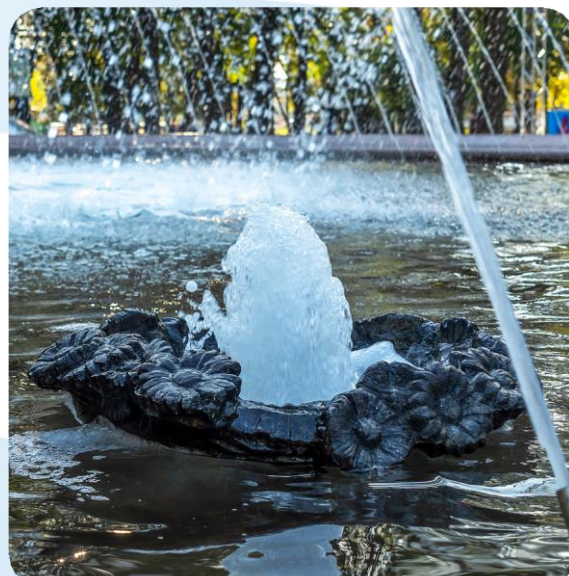

AISI 316

ONETOCK



Water level dependent nozzle/
Boquilla dependiente nivel agua

Stainless steel/ Acero Inoxidable

Water appearance/ Aspecto del agua Foamy/ Espumoso

Wind resistance/ Resistencia al viento


Splash/ Salpicadura

Sound level/ Nivel de sonido

Visibility/ Visibilidad



Nozzles/
Boquillas

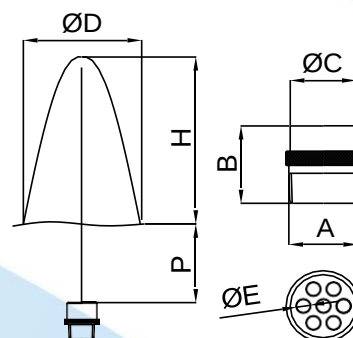

Dimensions/ Dimensiones						Performance/ Rendimiento				
Reference/ Referencia	Connection/ Conexión A	ØE x Jet n°/ ØE x n° de chorros	B x ØC	Water level / Nivel de agua P	Weight/ Peso	Height/ Altura H	15	25	35	50
		mm	mm	cm	Kg	cm				
F2501267	G 1/2" M BSP-NPT	Ø3X6	26.5 x 24	10	0,05	L/min	15	22	27	34
						m.c.a	3	5	8	12
						ØD cm	12	15	20	24
F2501065	G 1" M BSP-NPT	Ø6X6	36 x 35	5	0,13	L/min	21	30	38	45
						m.c.a	0,5	1,4	2,3	3,3
						ØD cm	10	12	20	24
				30		L/min	62	85	115	137
						m.c.a	4	7,2	13	19,5
						ØD cm	22	30	40	50
F2501561	G 1 1/2" M BSP-NPT	Ø8X7	46 x 50	5	0,30	l/min	52	71	87	103
						m.c.a	0,8	1,4	2	2,6
						ØD cm	13	20	26	30
				30		l/min	85	125	170	200
						m.c.a	1,4	3	6	8,5
						ØD cm	25	30	40	50

Más información en www.saferain.com | Further information at www.saferain.com