


# Dichroic lightfixtures/ Foco dicroico

**S**mall compact spotlights designed to illuminate no more than 3 metres high water jets, without a large diameter opening and ideal for secondary effects in ornamental fountains. Their cable glands designed and manufactured by Safe-Rain ensure an IP68 degree of protection. They can house 50mm MR16 dichroic lamps or similar. LED lamps available in 3000K white, 6000K white and RGB models.

**F**ocos compactos de pequeño tamaño destinados a la iluminación de chorros no superiores a 3 metros de altura, sin gran apertura en diámetro e ideales para efectos secundarios en fuentes ornamentales. Sus prensaestopas diseñados y fabricados por Safe-Rain aseguran un grado de protección IP68. Pueden alojar en su interior lámparas de tipo MR16 dicroicas de 50mm o similar. Disponibles lámparas LED modelos blanco 3000K, blanco 6000K y RGB.

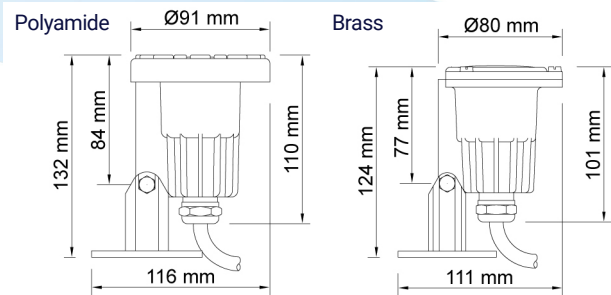

Certifications/ Certificaciones

IP68 CE



## Light charts/ Gráficos de iluminación.

Color	White /Blanco 6000k		White /Blanco 3000k		RGB		
	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro	
1,0 m	Ø 0,72	1754 lx	Ø 0,68	970 lx	Ø0,55	1062 lx	
1,5 m	Ø 1,10	584 lx	Ø 1,03	431 lx	Ø0,82	472 lx	
2,0 m	Ø 1,44	438 lx	Ø 1,37	243 lx	Ø1,10	265 lx	
2,5m	Ø2,16	281lx					

Lighting/  
Iluminación

## Details/ Detalles

## Electrical data/ Datos eléctricos

Polyamide 6-6/ Poliamida 6-6				Brass/ Latón				Lamp/ Lámpara			
Reference/ Referencia	Weight/ Peso	Reference/ Referencia	Weight/ Peso	Color/ Color	Beam angle/ Ángulo	Lumens/ Lúmenes	Power/ Potencia	Voltage/ Voltaje	Lamp Ref./ Ref. Lámpara	Electrical connection/ Conexión eléctrica	
F5450218	0,36 Kg	F5460219	0,94 Kg	White/ Blanco 6000K	45°	500 Lm	4W	12V AC	F5642054	1PG16 Ø6/9/12	
F5457418	0,36 Kg	F5467419	0,94 Kg	White/ Blanco 3000K	38°	480 Lm	6W	12V AC	F5642043		
F5455214	0,46 Kg	F5465215	1,05 Kg	RGB	25°	165 Lm	5,5W	12 / 24V DC	F5642537	0,5m H05RN-F 4x0,75mm²	
F5430014	0,32 Kg	F5440015	0,91 Kg	Without lamp/ Sin lámpara						1PG16 Ø6/9/12	